

**11, 12, 14, 41, 42, 44, A1, A2 :Pinii Soclului MY2**  
**1, 4, 5, 8, 9, 12, 13, 14 :Pinii Releului**

LED	Supply voltage	NO (SPDT-NO) output contact	Contacts	
			Open	Closed
	OFF	Open	x1 - x4	x1 - x2
	ON	Open	x1 - x4	x1 - x2
	ON	Open (Timing in Progress)	x1 - x4	x1 - x2
	ON	Closed	x1 - x2	x1 - x4

## Comutatoare de timp:



NOTE: time scales and functions must be set before energising the timer.

## Moduri de functionare:



### (AI) ON delay.

Apply power to timer.

Output contacts transfer after preset time has elapsed.  
Reset occurs when power is removed.



### (DI) ON pulse.


Apply power to timer.

Output contacts transfer immediately.  
After the preset time has elapsed, contacts reset.



### (GI) Fixed pulse (0.5s) delayed.

Apply power to timer. Output contacts transfer after preset time has elapsed. Reset occurs after a fixed time of 0.5s.

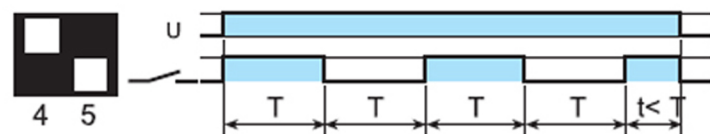

### (SW) Symmetrical recycling: ON start.

Apply power to timer.

Output contacts transfer immediately and cycle between ON and OFF for as long as power is applied. The ratio is 1:1 (time on = time off).